External-toothed Six Row Cylindrical Roller Slewing Bearings

SINOFOLIV

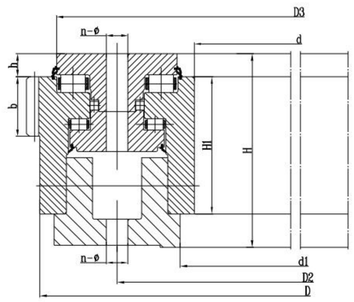

NOTE:

1. n1 is the number of lubricating oil holes, the customer can specify the location of oil holes according to the use situation.
2. n-φ can be changed into thread hole, thread diameter M, thread depth 2M.
3. The specifications in this sample are standard products, please contact SINOFOUV for any other special requirements.

Bearing Part Number	Boundary Dimensions				Mounting Hole Dimensions					Configuration Dimensions				Gear Parameter				Weight
	De	D	d	H	D1	D2	n	ϕ		D3	d1	H1	h	m	Z	b	x	
	mm				mm			mm		mm						mm		kg
HLW2725	2990	2914	2034	551	2474	2474	66	66		2822	2114	391	65	16	184	170	+0. 5	11500