

Toothless Triple Row Cylindrical Roller Slewing Bearings

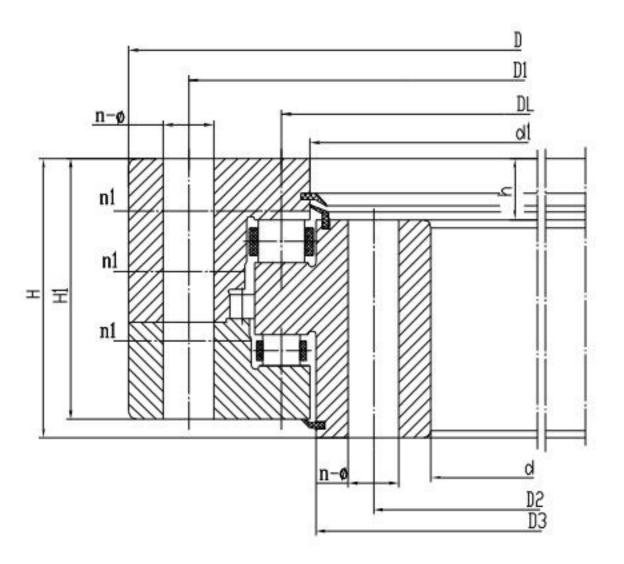

Bearing Part Number	Boundary Dimensions			Mounting Hole Dimensions				Configuration Dimensions						Weight
	D	d	H	D1	D2	n	ф	D3	d1	H1	h	n1	M	
	mm			mm			mm		mm				mm	kg
HYB500	634	366	148	598	402	24	18	474	463	138	32	4	16	191
HYB560	694	426	148	658	462	24	18	534	523	138	32	4	16	214
HYB630	764	496	148	728	532	28	18	604	593	138	32	4	16	240
HYB710	844	576	148	808	612	28	18	684	673	138	32	4	16	272
HYB800	964	636	182	920	680	36	22	770	759	172	40	4	20	459
HYB900	1064	736	182	1020	780	36	22	870	859	172	40	4	20	519
HYB1000	1164	836	182	1120	880	40	22	970	959	172	40	5	20	577
HYB1120	1284	956	182	1240	1000	40	22	1090	1079	172	40	5	20	650
HYB1150	1310	1000	140	1250	1055	36	26	1120	1310	130	0	4	24	531
HYB1250	1445	1055	220	1393	1107	45	26	1210	1200	210	50	5	24	1030
HYB1400	1595	1205	220	1543	1257	45	26	1363	1350	210	50	5	24	1170
HYB1600	1795	1405	220	1743	1457	48	26	1563	1550	210	50	6	24	1341
HYB1705	1910	1500	182	1844	1566	48	33	1749	1755	162	10	24	30	1226
HYB1800	1995	1605	220	1943	1657	48	26	1763	1750	210	50	6	24	1510
HYB1825	2020	1655	136	1950	1725	36/40	33	1880	1865	123	13	5	30	870
HYB1835	2020	1655	156	1950	1725	36/40	33	1882	1877	123	19	6	30	955
HYB2000	2221	1779	231	2155	1845	60	33	1967	1945	219	54	6	30	1949
HYB2240	2461	2019	231	3395	2085	60	33	2207	2185	219	54	6	30	2197
HYB2400	2650	2190	154	2560	2280	60	39	2446	2442	121	14	6	36	1580
HYB2500	2721	2279	231	2655	2345	72	33	2555	2533	219	12	8	30	2391
HYB2500C	2721	2279	231	2655	2345	72	33	2555	2533	177	12	8	30	2391
HYB2800	3021	2579	231	2955	2645	72	33	2867	2833	219	54	8	30	2924
HYB3150	3432	2868	270	3342	2958	72	45	3104	3090	258	65	8	42	4551
HYB3175	3395	2965	184	3328	3038	64	33	3221	3206	154	10.5	8	30	2523
HYB3550	3832	3268	270	3742	3358	72	45	3504	3490	258	65	8	42	5178
HYB4000	4243	3762	270	4165	3840	72	39	4050	4037	217	55	9	36	4580
HYB4500	4850	4235	268	4700	4325	68	45	4560	4546	203	10	11	42	7150
HYB5000	5290	4735	268	5200	4825	78	39	5064	5048	203	10	12	36	7280
HYB5055	5335	4785	275	5245	4875	90	45	5101	5130	210	17	15	42	7376

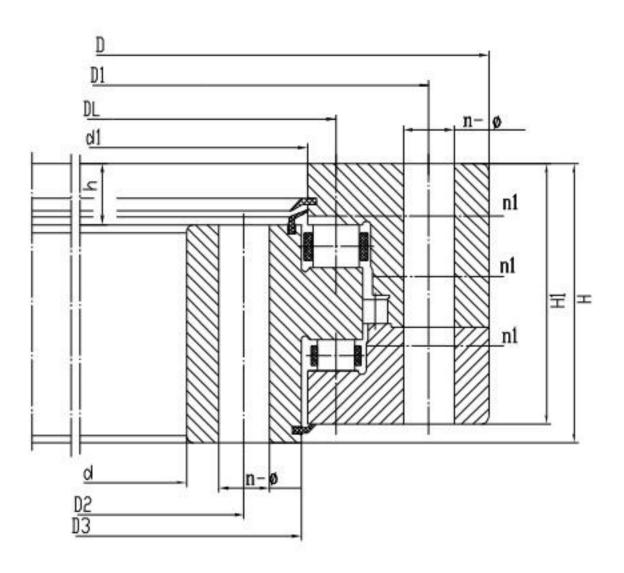

NOTE:

- depth 2M.

5INOFOLIV

1. n1 is the number of lubricating oil holes, the customer can specify the location of oil holes according to the use situation. 2. $n-\phi$ can be changed into thread hole, thread diameter M, thread

3. The specifications in this sample are standard products, please contact SINOFOUV for any other special requirements.